

MUSKOX

SNOWBLOWERS (THAT BACKDRAG)

NOW AVAILABLE IN THREE SIZES: 60", 78" & 90" WIDE




FEATURES



- 1 LEVELING WHEEL**
Line up the MUSKOX perfect every time.
- Train new users fast.
 - Run the MUSKOX in the optimal position.

- 3 TOP RUBBER CUT EDGE**
Rubber Cut Edge engages when backdragging.
- Protects delicate substrates
 - Squeegees away moisture, which requires less salting.

- 4 CHAIN TENSIONER**
New spring chain tensioning system is easily adjusted from outside the blower.



- 5 SIX BLADED FAN**
Our six bladed blower fan blows snow more efficiently, allowing you to clear snow faster.

- 2 LOWERED CHUTE**
The lower height of the chute gives you excellent visibility and reduces the risk of plugging.


HYDRAULIC FLOW

MUSKOX 24-60 • Low, Medium, & High Flow (12.5-29 GPM)

MUSKOX 24-78 • Low, Medium, & High Flow (14-45 GPM)

MUSKOX 24-90 • High Flow (33-45 GPM)

- 8 DUAL SERRATED AUGERS***
The optional* Dual Auger chews through big snow faster and speeds up backdragging operations.

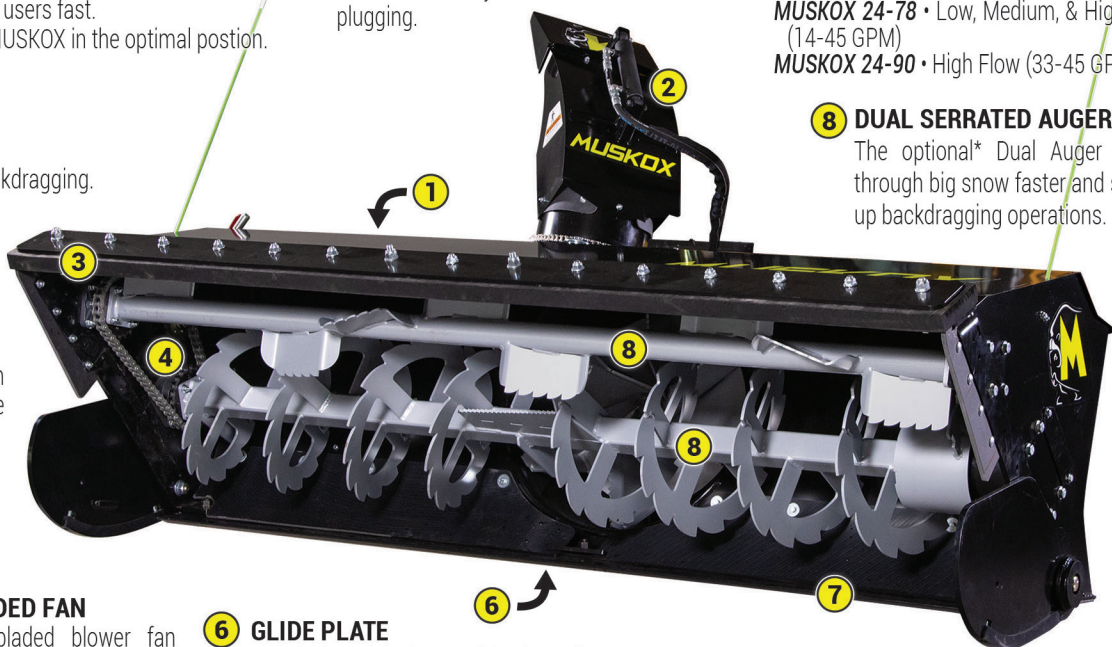

- 6 GLIDE PLATE**
The design of the large Glide Plate allows the blower to skim over surfaces on UHMW Plastic, protecting softer substrates and lawns.

- 7 LOWER STEEL CUT EDGE**
Engage the high carbon steel cutting edge only when you need to. This keeps it sharp to tackle that ice and compacted snow.




AVAILABLE IN FOUR MODELS

MUSKOX 25-60
DUALY
60" Wide Dual Auger
(12.5-29 GPM)

MUSKOX 25-78
SINGLE
78" Wide Single Auger
(14-45 GPM)

MUSKOX 25-78
DUALY
78" Wide Dual Auger
(19-45 GPM)

MUSKOX 25-90
DUALY
90" Wide Dual Auger
(33-45 GPM)

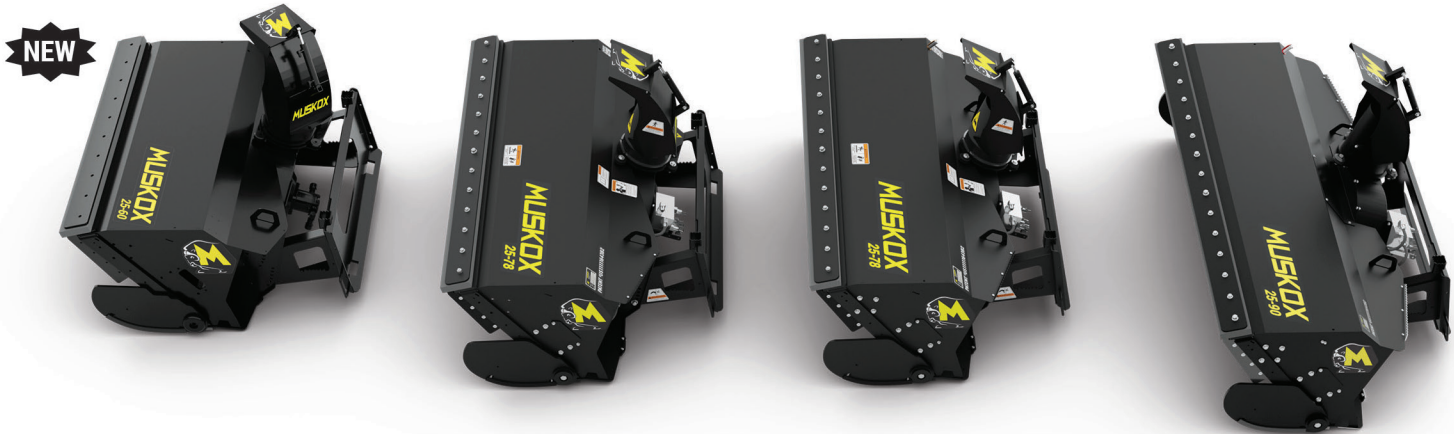

RUN WITH THE HERD

BACKDRAG AND BLOW!

The MUSKOX clears snow fast. The blower's unique design allows you to be gentle on soft surfaces like stamped concrete, gravel, and grass while giving you the ability to get aggressive with ice at any time. And our innovative backdrag capability clears snow in front of doors and next to buildings. So you don't waste time shoveling.



Scan for more Info!

MUSKoxMN.COM
 218-288-1905



SPECIFICATIONS

MODEL	25-60 DUALY	25-78 SINGLE	25-78 DUALY	25-90 DUALY
FLOW				
Type	Low, Standard, High	Low, Standard, High		High
Rate	12.5-29 gpm	14-45 gpm	19-45 gpm	33-45 gpm
CUTTING EDGE				
Width	60"	78"		90"
BLOWER FAN				
Diameter	24"	24"		24"
SERRATED AUGER				
Top Auger	10" Diameter	N/A	10" Diameter	10" Diameter
Bottom Auger	18" Diameter	18" Diameter	18" Diameter	18" Diameter
MOTORS				
Trice	Auger, Fan, Chute	Auger, Fan, Chute		Auger, Fan, Chute
APPROXIMATE WEIGHT				
Landed	1200 lbs	1275 lbs	1350 lbs	1440 lbs
CHUTE & DEFLECTOR CONTROLS				
	Electric over hydraulic	Electric over hydraulic		Electric over hydraulic
DIMENSIONS				
	61L x 53W x 58 H	79L x 53W x 58 H		91L x 53W x 58 H